DRIVEWAY PERMIT APPLICATION

TO: THE UPSHUR COUNTY COMMISSIONERS COURT COUNTY OF UPSHUR GILMER, TEXAS

| PRECINCT 4 DATE Se | eptember 20, 2019 |
|---|--|
| Dr. Richardson, TX, does hereby purpo County Road Possum Hollow. Propose 30th day of September, 20 I, Larry set forth in this application and understa | y Hunnicutt, whose principal address is 1906 Richland ose to place a driveway culvert within the ROW of ed construction will begin, if approved, on or after the Hunnicutt, hereby attest that I have read the conditions and its contents. The culvert will/_X_ will not be nnel. This is a _X_ new installation extension. |
| SIGNATURE:TELEPHONE:440-452-7911 | |
| APPROVAL | OF PERMIT APPLICATION |
| The Upshur County Commissioners County your proposed <u>driveway culvert</u> for the a will be a <u>"x '</u> culvert. | art offers no objection to the location on the right of way of address shown above. The proposed driveway structure |
| • • | |
| Recommended by | . . |
| APPROVED ON THIS DAY (| OF, 20 |

TERRI ROSS
COUNTY CLERK
2019 SEP 30 AM 11: 09
UPSHUKCOUNTY, TX.
BY
DEPUTY

NOTICE OF PROPOSED INSTALLATION NOTICE OF PROPOSED INSTALLATION PIPE AND/OR UTILITY LINES

DATE: 9/13/2019

TO: UPSHUR COUNTY COMMISSIONERS COURT c/o UPSHUR COUNTY ENGINEER UPSHUR COUNTY ROAD & BRIDGE DEPARTMENT P. O. BOX 730 Gilmer, TX 75644

EXPIRES: 12/13/2019

Formal notice is hereby given that <u>Etex Telephone Coop., Inc.</u> proposes to bore a <u>New Fiber Optic</u> line within the right-of-way of County Roads <u>Mimosa Rd Both North and South</u>, <u>Nutmeg both North and South</u>, <u>Catclaw</u>, <u>Pecan</u>, <u>Silver Maple and tangerine</u> as follows Installing New fiber optic lines on both sides of said county roads. All construction will be directional bored in at a min depth of 60" on the up slope of the county right of way.

The location and description of the proposed line and appurtenances is more fully shown by three copies of drawings attached to this notice. The line will be constructed and maintained on the County right-of-way as directed by the County Engineer in accordance with current Upshur County specifications.

Construction of this line will begin on or after the 13 day of September, 2019 and will be completed within 90 days of the date of approval.

Firm <u>Etex Telephone Coop.,Inc.</u>
By <u>Martin Thompson</u>

Title Right of way solicitor

Address P.O. Box 130 Gilmer TX 75644

NOTE: 1. This form to be submitted in triplicate for each proposed installation.

- 2. The permit shall be in effect until the utility line is removed from the right of way.
- 3. Inform the County Engineer if work is not completed within this time

APPROVAL

| TO: Etex Telephone Coop.,Inc. | DATE <u>9/13/2019</u> |
|-------------------------------|-----------------------|
| P.O. Gilmer TX | |
| 75644 | |

The Upshur County Commissioners Court offers no objections to the location on the right-of-way of your proposed <u>New Fiber Optic</u> line across <u>All said county Roads</u> as shown by accompanying drawings and notice dated <u>Approved</u>, except as noted below:

N/A

It is expressly understood that the Upshur County Commissioners Court does not purport, hereby, to grant and right, claim, title, or easement in or upon this county road; and it is further understood that in the future should for any reason Upshur County need to work, improve, relocate, widen, increase add to or any manner change the structure of this right-of-way line, this line, if affected, will be moved under the direction of the Upshur County Engineer and shall be relocated at the complete expense of the owner. Upshur County shall be notified a minimum of 48 hours prior to the beginning of any work.

All work on the county right-of-way shall be performed in accordance with the County Engineer's instructions. The installation shall not damage any part of the highway and adequate provisions must be made to cause minimum inconvenience to traffic and adjacent property owners. Special specifications for placing this line are as follows:

- 1. All ground lines are to be installed a minimum of 36 inches below the flowline of the adjacent drainage or borrow ditch.
- 2. All excavations within the right-of-way and not under surfacing shall be backfilled by tamping in 6 inch horizontal layers. All surplus material shall be removed from the right-of-way and the excavation finished flush with surrounding natural ground.
- 3. Lines crossing under surfaced roads and under surfaced cross roads within the right-of-way shall be placed by boring. Boring shall extend from crown line to crown line.
- 4. All lines under roads carrying pressure in excess of 50 psi shall be enclosed in satisfactory casing extending from right-of-way line to right-of-way line. Pipe used for casing may be of any type approved by the County Engineer and shall be capable of Supporting the load of roadbed and traffic and shall be so constructed that there will be no leakage of any matter through the casing for its entire length. Inside diameter of casing shall be at least 2 inches greater than the largest outside diameter of carrier pipe, joint or couplings. (Encasement is not required on lines installed 48 inches or greater below flowline.)
- 5. All lines, where practicable, shall be located to cross roadbed at approximately right angles thereto. No lines are to be installed under or within 50 feet of either end of a bridge unless approved by the County Engineer in writing. No lines shall be placed inside any culvert or within 10 feet of the closest point of same.
- 6. Parallel lines will be installed as near the right-of-way lines as is possible and no parallel line will be installed in the roadbed or between the drainage ditch and roadbed unless approved by the County Engineer in writing.
- 7. Overhead lines will have a minimum clearance of 18 feet above the road surface at point of crossing.
- 8. Operations along roadways shall be performed in such a manner that all excavated material be kept off the pavements at all times, as well as all operating equipment and materials. Do not use equipment or installation procedures which will damage any road surface or structure. The cost of any repairs to road surfaces, roadbed, structures or other right-of-way features as direct result of this installation will be borne by the owner of this line.
- 9. Barricades, warning signs, lights and flagmen, when necessary, shall be provided by the contractor or owner. One half of the traveled portion of the road must be open to traffic at all times. All traffic control shall be in accordance with the requirements of the current version of the Texas MUTCD.

10. Utility company shall install adequate erosion control measures for any excavation work being performed.

| APPROVED: | APPROVED: |
|--------------------|--|
| Road Administrator | Chairperson, Upshur County Commissioners Court |

NOTICE OF PROPOSED INSTALLATION PIPE AND/OR UTILITY LINES

DATE: 7/19/2019

TO: UPSHUR COUNTY COMMISSIONERS COURT c/o UPSHUR COUNTY ENGINEER UPSHUR COUNTY ROAD & BRIDGE DEPARTMENT P. O. BOX 730 Gilmer, TX 75644

EXPIRES: 10/19/2019

Formal notice is hereby given that <u>Etex Telephone Coop.</u>, <u>Inc.</u> proposes to bore a <u>New Fiber Optic</u> line within the right-of-way of County Road <u>Pin Oak</u> as follows: Installing new fiber and duct on both sides of said county roads. All construction will be directionally bored at a min depth of 60" within the county Road and Bridge right-of-way.

The location and description of the proposed line and appurtenances is more fully shown by three copies of drawings attached to this notice. The line will be constructed and maintained on the County right-of-way as directed by the County Engineer in accordance with current Upshur County specifications.

Construction of this line will begin on or after the 16th day of <u>September</u>, 2019 and will be completed within 90 days of the date of <u>approval</u>.

Firm <u>Etex Telephone Coop., Inc.</u>

By <u>Matthew Williams</u>
Title Right-of-way solicitor

Address P.O. Box 130 Gilmer, TX 75644

NOTE: 1. This form to be submitted in triplicate for each proposed installation.

- 2. The permit shall be in effect until the utility line is removed from the right of way.
- 3. Inform the County Engineer if work is not completed within this time

TO: Etex Telephone Coop., Inc. P.O. Box 130 Gilmer, TX 75644

DATE 9/13/2019

The Upshur County Commissioners Court offers no objections to the location on the right-of-way of your proposed New Fiber Optic line across Pin Oak Rd as shown by accompanying drawings and notice dated Approved, except as noted below:

N/A

It is expressly understood that the Upshur County Commissioners Court does not purport, hereby, to grant and right, claim, title, or easement in or upon this county road; and it is further understood that in the future should for any reason Upshur County need to work, improve, relocate, widen, increase add to or any manner change the structure of this right-of-way line, this line, if affected, will be moved under the direction of the Upshur County Engineer and shall be relocated at the complete expense of the owner: Upshur County shall be notified a minimum of 48 hours prior to the beginning of any work.

All work on the county right-of-way shall be performed in accordance with the County Engineer's instructions. The installation shall not damage any part of the highway and adequate provisions must be made to cause minimum inconvenience to traffic and adjacent property owners. Special specifications for placing this line are as follows:

- 1. All ground lines are to be installed a minimum of 36 inches below the flowline of the adjacent drainage or borrow ditch.
- 2. All excavations within the right-of-way and not under surfacing shall be backfilled by tamping in 6 inch horizontal layers. All surplus material shall be removed from the right-of-way and the excavation finished flush with surrounding natural ground.
- 3. Lines crossing under surfaced roads and under surfaced cross roads within the right-of-way shall be placed by boring. Boring shall extend from crown line to crown line.
- 4. All lines under roads carrying pressure in excess of 50 psi shall be enclosed in satisfactory casing extending from right-of-way line to right-of-way line. Pipe used for casing may be of any type approved by the County Engineer and shall be capable of Supporting the load of roadbed and traffic and shall be so constructed that there will be no leakage of any matter through the casing for its entire length. Inside diameter of casing shall be at least 2 inches greater than the largest outside diameter of carrier pipe, joint or couplings. (Encasement is not required on lines installed 48 inches or greater below flowline.)
- 5. All lines, where practicable, shall be located to cross roadbed at approximately right angles thereto. No lines are to be installed under or within 50 feet of either end of a bridge unless approved by the County Engineer in writing. No lines shall be placed inside any culvert or within 10 feet of the closest point of same.
- 6. Parallel lines will be installed as near the right-of-way lines as is possible and no parallel line will be installed in the roadbed or between the drainage ditch and roadbed unless approved by the County Engineer in writing.
- 7. Overhead lines will have a minimum clearance of 18 feet above the road surface at point of crossing.
- 8. Operations along roadways shall be performed in such a manner that all excavated material be kept off the pavements at all times, as well as all operating equipment and materials. Do not use equipment or installation procedures which will damage any road surface or structure. The cost of any repairs to road surfaces, roadbed, structures or other right-of-way features as direct result of this installation will be borne by the owner of this line.
- 9. Barricades, warning signs, lights and flagmen, when necessary, shall be provided by the contractor or owner. One half of the traveled portion of the road must be open to traffic at all times. All traffic control shall be in accordance with the requirements of the current version of the Texas MUTCD.
- 10. Utility company shall install adequate erosion control measures for any excavation work being performed.

| APPROVED:_ | | | APPROVED: |
|------------|------|---------------|---|
| | Road | Administrator | Chairperson, Upshur County Commissioners County |
| | | NOI | ICE OF PROPOSED INSTALLATION |

Revised 11/30/10

NOTICE OF PROPOSED INSTALLATION PIPE AND/OR UTILITY LINES

DATE: September 20, 2019 TO: UPSHUR COUNTY COMMISSIONERS COURT . EXPIRES: c/o UPSHUR COUNTY ENGINEER UPSHUR COUNTY ROAD & BRIDGE DEPARTMENT P. O. BOX 730 Gilmer, TX 75644 Pritchett W.S.C Formal notice is hereby given that _____proposes to bore a ____ line within the right-of-way of County Road 8" w.m. as follows: Red Maple Road & Red Cedar Road The location and description of the proposed line and appurtenances is more fully shown by three copies of drawings attached to this notice. The line will be constructed and maintained on the County right-of-way as directed by the County Engineer in accordance with current Upshur County specifications. Construction of this line will begin on or after the ____01_ day of Nov., 20_19__ and will be completed within 90 days of the date of approval. Hayes Engineering, Inc. Firm Stan Hayes By Project Manager Title Address 2126 Alpine St., Longview, TX 75601 This form to be submitted in triplicate for each proposed installation.

The permit shall be in effect until the utility line is removed from the right of way.

3. Inform the County Engineer if work is not completed within this time.

NOTE: 1.

APPROVAL

TO: Pritchett Water Supply 3670 SH 155 S Gilmer, TX 75645 DATE 9/23/19

Ç

The Upshur County Commissioners Court offers no objections to the location on the right-of-way of your proposed 8" water main line across Red Maple & Red Cedar roads as shown by accompanying drawings and notice dated 9/20/19, except as noted below:


N/A

It is expressly understood that the Upshur County Commissioners Court does not purport, hereby, to grant and right, claim, title, or easement in or upon this county road; and it is further understood that in the future should for any reason Upshur County need to work, improve, relocate, widen, increase add to or any manner change the structure of this right-of-way line, this line, if affected, will be moved under the direction of the Road Administrator and shall be relocated at the complete expense of the owner. Upshur County shall be notified a minimum of 48 hours prior to the beginning of any work.

All work on the county right-of-way shall be performed in accordance with the Road Administrator's instructions. The installation shall not damage any part of the highway and adequate provisions must be made to cause minimum inconvenience to traffic and adjacent property owners. Special specifications for placing this line are as follows:

- 1. All ground lines are to be installed a minimum of 36 inches below the flowline of the adjacent drainage or borrow ditch.
- 2. All excavations within the right-of-way and not under surfacing shall be backfilled by tamping in 6 inch horizontal layers. All surplus material shall be removed from the right-of-way and the excavation finished flush with surrounding natural ground.
- 3. Lines crossing under surfaced roads and under surfaced cross roads within the right-of-way shall be placed by boring. Boring shall extend from crown line to crown line.
- 4. All lines under roads carrying pressure in excess of 50 psi shall be enclosed in satisfactory casing extending from right-of-way line to right-of-way line. Pipe used for casing may be of any type approved by the Road Administrator and shall be capable of Supporting the load of roadbed and traffic and shall be so constructed that there will be no leakage of any matter through the casing for its entire length. Inside diameter of casing shall be at least 2 inches greater than the largest outside diameter of carrier pipe, joint or couplings. (Encasement is not required on lines installed 48 inches or greater below flowline.)
- 5. All lines, where practicable, shall be located to cross roadbed at approximately right angles thereto. No lines are to be installed under or within 50 feet of either end of a bridge unless approved by the Road Administrator in writing. No lines shall be placed inside any culvert or within 10 feet of the closest point of same.
- 6. Parallel lines will be installed as near the right-of-way lines as is possible and no parallel line will be installed in the roadbed or between the drainage ditch and roadbed unless approved by the Road Administrator in writing.
- 7. Overhead lines will have a minimum clearance of 18 feet above the road surface at point of crossing.
- 8. Operations along roadways shall be performed in such a manner that all excavated material be kept off the pavements at all times, as well as all operating equipment and materials. Do not use equipment or installation procedures which will damage any road surface or structure. The cost of any repairs to road surfaces, roadbed, structures or other right-of-way features as direct result of this installation will be borne by the owner of this line.
- 9. Barricades, warning signs, lights and flagmen, when necessary, shall be provided by the contractor or owner. One half of the traveled portion of the road must be open to traffic at all times. All traffic control shall be in accordance with the requirements of the current version of the Texas MUTCD.
- 10. Utility company shall install adequate erosion control measures for any excavation work being performed.

| APPROVED: | 5/2 | APPROVED: |
|-----------|--------------------|--|
| | Road Administrator | Chairperson, Upshur County Commissioners Court |
| | | Revised 11/30/10 |

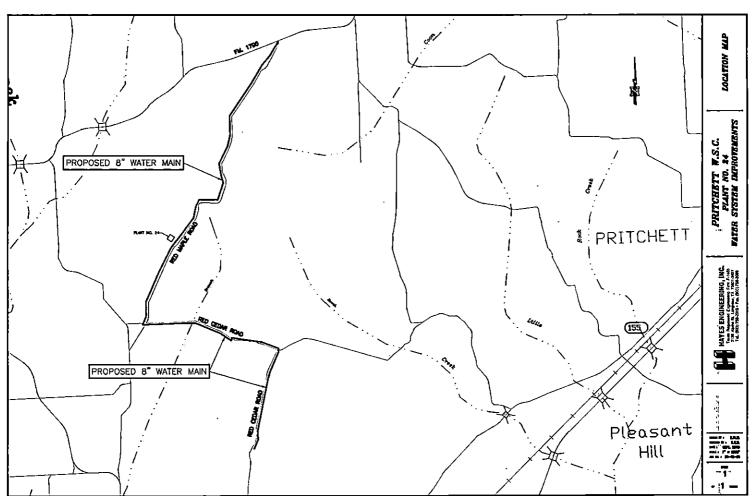

+

NOTICE OF PROPOSED INSTALLATION PIPE AND/OR UTILITY LINES

DATE: 9/23/2019

TO: UPSHUR COUNTY COMMISSIONERS COURT c/o UPSHUR COUNTY ENGINEER UPSHUR COUNTY ROAD & BRIDGE DEPARTMENT

P.O. BOX 730 Gilmer, TX 75644 EXPIRES: 12/23/2019

Formal notice is hereby given that Etex Telephone Coop. Inc. proposes to bore a New Fiber Optic line within the right-of-way of County Road Crabapple, Evergreen, Pomagranate, Mustang, as follows: Installing new fiber optic cable with duct on both sides of said roads. All construction will be directional bored in at min depth of 60" on the up side of the county road right of way.



The location and description of the proposed line and appurtenances is more fully shown by three copies of drawings attached to this notice. The line will be constructed and maintained on the County right-of-way as directed by the County Engineer in accordance with current Upshur County specifications.

Construction of this line will begin on or after the 19 day of September, 2019 and will be completed within 90 days of the date of approval.

> Firm Etex Telephone Coop., Inc. By Martin Thompson

Title Right of way solicitor

Address P.O. 130 Gilmer TEX 75644

NOTE: 1. This form to be submitted in triplicate for each proposed installation.

- 2. The permit shall be in effect until the utility line is removed from the right of way.
- 3. Inform the County Engineer if work is not completed within this time

APPROVAL

| TO:Etex Telephone Coop.,Inc. P.O. Box 130 Gilmer Tx 75644 | DATE <u>9/19/2019</u> | |
|--|--|--|
| The Upshur County Commissioners Court offers no objections Fiber Optic line across Said Roads as shown by accompanying dra | | |
| N/A | | |
| It is expressly understood that the Upshur County Commissioners Coureasement in or upon this county road; and it is further understood that i improve, relocate, widen, increase add to or any manner change the strumoved under the direction of the Upshur County Engineer and shall be shall be notified a minimum of 48 hours prior to the beginning of any was a structure of the direction of the Upshur County Engineer and shall be shall be notified a minimum of 48 hours prior to the beginning of any was a structure of the direction of the Upshur County Engineer and shall be notified a minimum of 48 hours prior to the beginning of any was a structure of the upshur County Engineer and shall be shall be notified a minimum of 48 hours prior to the beginning of any was a structure of the upshur County Engineer and shall be shall be notified a minimum of 48 hours prior to the beginning of any was a structure of the upshur County Engineer and shall be shall be notified a minimum of 48 hours prior to the beginning of any was a structure of the upshur County Engineer and shall be shall be notified a minimum of 48 hours prior to the beginning of any was a structure of the upshur County Engineer and the upsh | n the future should for any reason Upshur County need to work, acture of this right-of-way line, this line, if affected, will be relocated at the complete expense of the owner. Upshur County | |
| All work on the county right-of-way shall be performed in accordance on the damage any part of the highway and adequate provisions must be made property owners. Special specifications for placing this line are as follows: | ade to cause minimum inconvenience to traffic and adjacent | |
| 1. All ground lines are to be installed a minimum of 36 inches below the | ne flowline of the adjacent drainage or borrow ditch. | |
| 2. All excavations within the right-of-way and not under surfacing shall surplus material shall be removed from the right-of-way and the excava- | | |
| 3. Lines crossing under surfaced roads and under surfaced cross roads shall extend from crown line to crown line. | within the right-of-way shall be placed by boring. Boring | |
| 4. All lines under roads carrying pressure in excess of 50 psi shall be enclosed in satisfactory casing extending from right-of-way line to right-of-way line. Pipe used for casing may be of any type approved by the County Engineer and shall be capable of Supporting the load of roadbed and traffic and shall be so constructed that there will be no leakage of any matter through the casing for its entire length. Inside diameter of casing shall be at least 2 inches greater than the largest outside diameter of carrier pipe, joint or couplings. (Encasement is not required on lines installed 48 inches or greater below flowline.) | | |
| 5. All lines, where practicable, shall be located to cross roadbed at appunder or within 50 feet of either end of a bridge unless approved by the any culvert or within 10 feet of the closest point of same. | | |
| 6. Parallel lines will be installed as near the right-of-way lines as is postetween the drainage ditch and roadbed unless approved by the County | | |
| 7. Overhead lines will have a minimum clearance of 18 feet above the | road surface at point of crossing. | |
| 8. Operations along roadways shall be performed in such a manner that all excavated material be kept off the pavements at all times, as well as all operating equipment and materials. Do not use equipment or installation procedures which will damage any road surface or structure. The cost of any repairs to road surfaces, roadbed, structures or other right-of-way features as direct result of this installation will be borne by the owner of this line. | | |
| 9. Barricades, warning signs, lights and flagmen, when necessary, shall traveled portion of the road must be open to traffic at all times. All traffic current version of the Texas MUTCD. | | |
| 10. Utility company shall install adequate erosion control measures for | any excavation work being performed. | |
| APPROVED: APPRO Road Administrator NOTICE OF PROPOSED | VED: Chairperson, Upshur County Commissioners Court INSTALLATION | |
| | Revised 11/30/10 | |

Revised 11/30/10